

# ACTIVE LED DISPLAY SOLUTION

## INDOOR & OUTDOOR




SLIM



EASY INSTALLATION



LIGHT WEIGHT

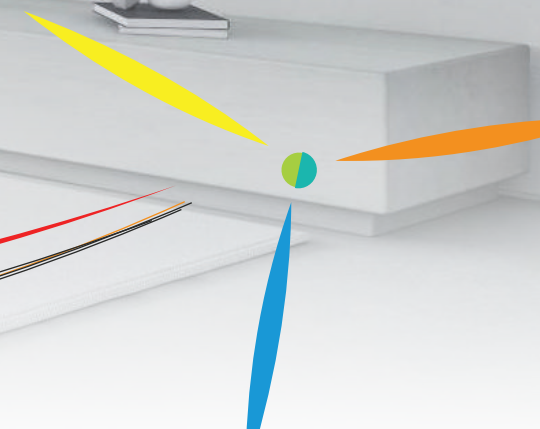



## Consultation

We start by understanding your project requirements and vision



## Design

Our team of experts creates a customized LED display design that meets your specifications



## Manufacturing

We utilize state-of-the-art technology to manufacture your LED display with precision

END-TO-END MANAGED SERVICES



## Installation

Our skilled technicians ensure a seamless installation process, minimizing downtime



## Support

We provide ongoing maintenance and support to keep your LED display performing at its best



## Manage

Pro-actively manage the entire process and maintenance service

## Certifications :



# Why choose Geeken ?



Skilled Manpower



Chip-Level  
In-House Repair



Resilient R&D



Vast Range of  
products



On order  
customisation



Pan India  
Presence



In-House  
Service Team



# AUDI 1



High brightness of upto  
4000-5500 nits



4K UHD



5-year Warranty



Dust protection



IP67  
protection



Vigilant  
technology



Easy installation  
& maintenance



Light-weight

## Bringing **Light to Life** in Every Pixel


Ready to bring your vision to life? Contact **Interact** today to discuss your LED display needs.  
We're here to transform your ideas into stunning visual experiences

## Cabinetry features

- Easy to Ship, Install & Service
- MS / Aluminium Die Casting
- Cable less
- Dust & Weather Proof
- Multiple Design & Size options
- 24/7 Operations
- Landscape & Portrait options



## Cabinetry images

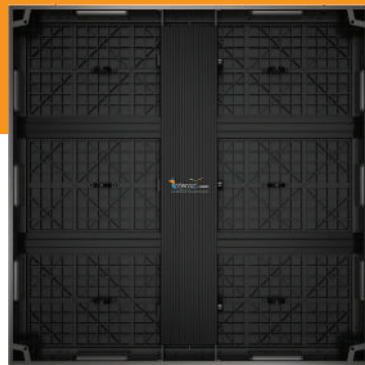

Back



Front



Side

# Product Specifications

## I N D O O R

## O U T D O O R

Model Name	P-1.2 COB	P-1.5	P-2.5	P-3	P-4	P-6	P-8
Pixel Pitch (mm)	1.2 mm	1.5 mm	2.5 mm	3 mm	4 mm	6 mm	8 mm
Cabinet Dimension (W x H x D, mm)	600 X 337.5 X 30	640 X 480 X 70	640 X 480 X 70	640 X 480 X 70	960 X 960 X 115	960 X 960 X 115	960 X 960 X 115
Module Size	150 x 168.75	320 x 160	320 x 160	192 x 192	320 x 160	192 x 192	320 x 160
Maximum Brightness (nits)	≥ 500-1200	≥ 600-800	≥ 600-800	≥ 600-800	5000	5500	5500
Contrast Ratio	10000:1	9000:1	8000:1	8000:1	5000:1	5000:1	5000:1
Max. Power (W/m <sup>2</sup> )	650	600	550	500	600	650	650
Refresh Rate (Hz)	≥ 3840	≥ 3840	≥ 3840	≥ 3840	≥ 3840	≥ 3840	≥ 1920
Cabinet Type	Die-Cast Aluminium	Die-Cast Aluminium	Die-Cast Aluminium / MS	Die-Cast Aluminium / MS	Die-Cast Aluminium / MS	Die-Cast Aluminium / MS	Die-Cast Aluminium / MS
Data Processing	14 - 16 Bit	14 - 16 Bit	14 - 16 Bit	14 - 16 Bit	14 - 16 Bit	14 - 16 Bit	14 - 16 Bit
Ingress Protection	-	-	-	-	Front IP65 / Back IP65	Front IP65 / Back IP65	Front IP65 / Back IP65

**Disclaimer**- All product images shown and specifications / features mentioned in this brochure are for reference only, actual product and specifications may change without any prior notice due to consistent product development and upgradation.

SMTOWN @ COEX ARTIUM

SMTOWN @ COEX ARTIUM



- +91-1244422850
- contact.interact@geeken.co.in
- www.interactbygeeken.in
- Plot No-161, Sector-5, IMT Manesar Gurugram, Haryana - 122050

