



Interactive Flat Panel Display

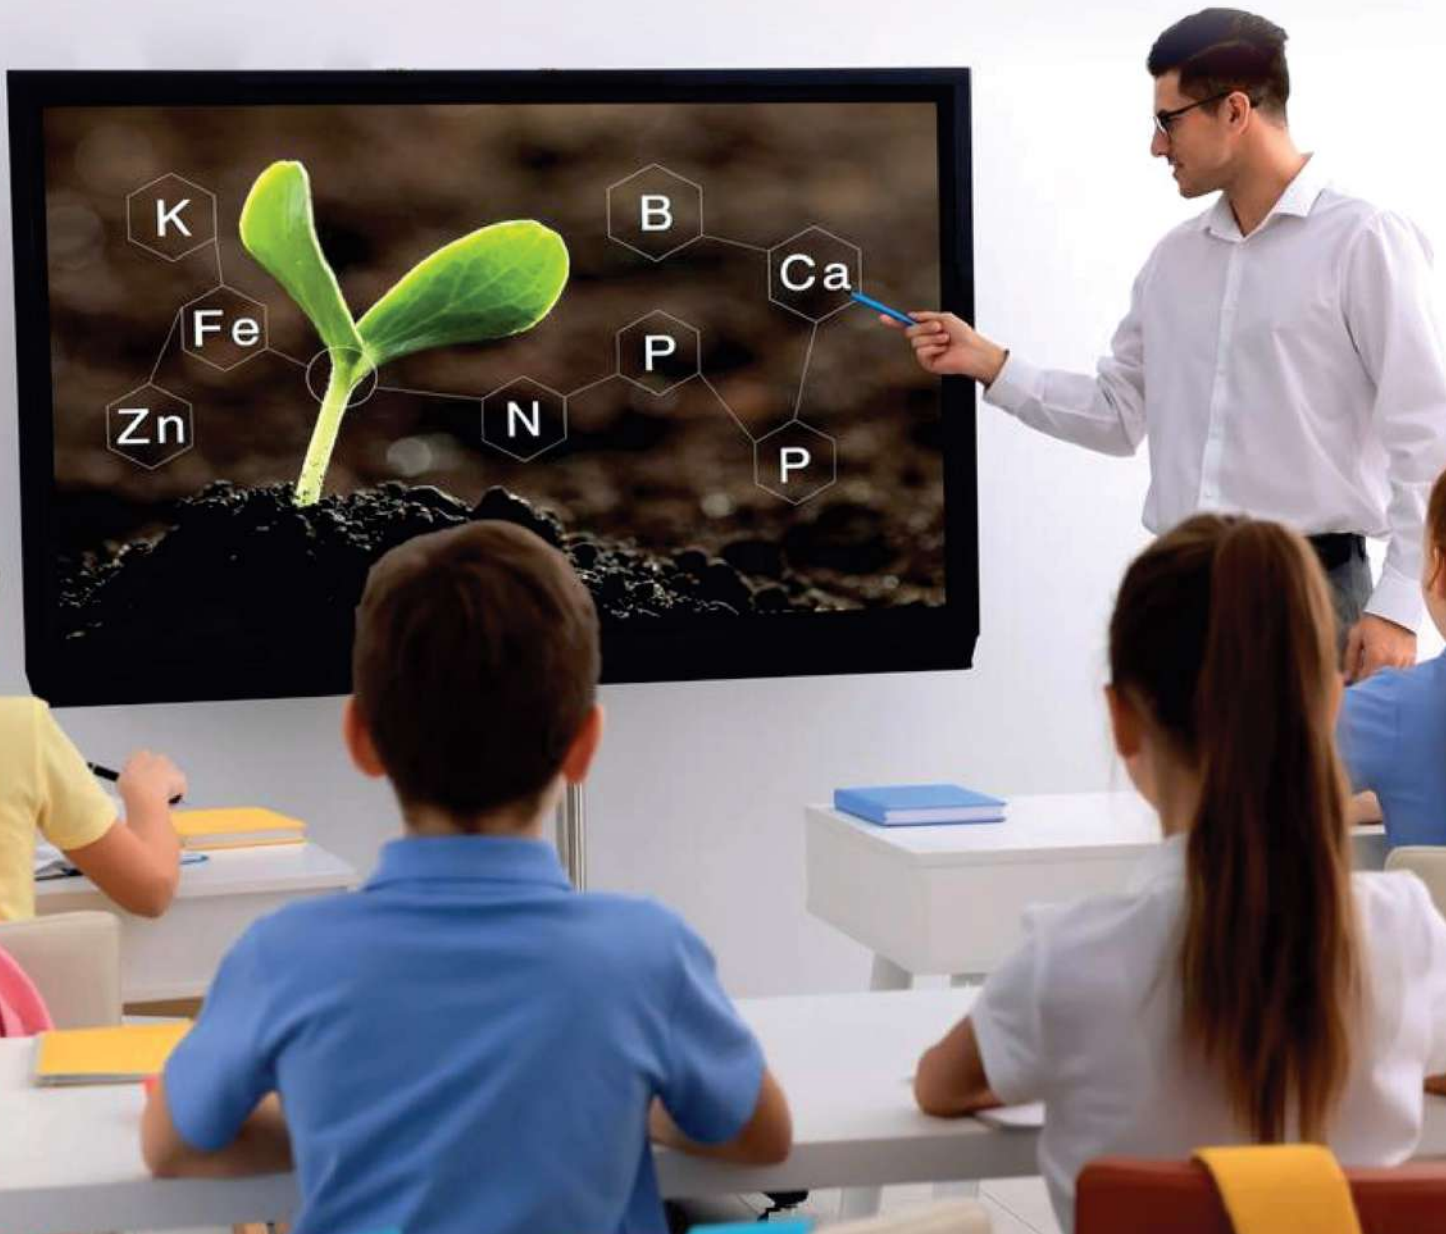

INTERACTIVE SOLUTION TO ENHANCE PRODUCTIVITY AT WORK.

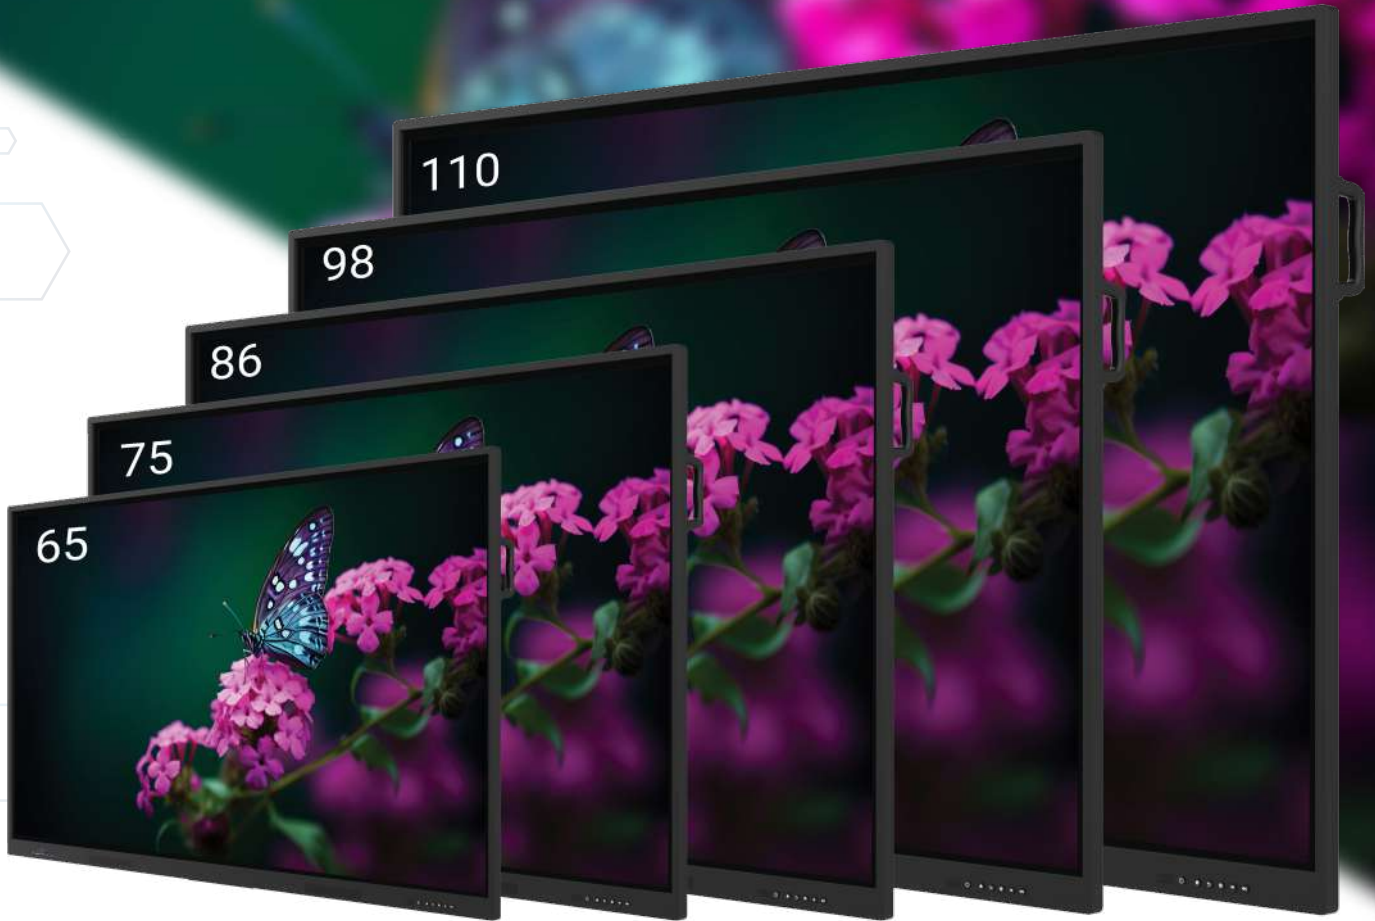

Application Areas



Language Lab



Corporate Office



Virtual Classroom



Distance Learning




**Board / Conference
Room**



Computer Lab

Key Features

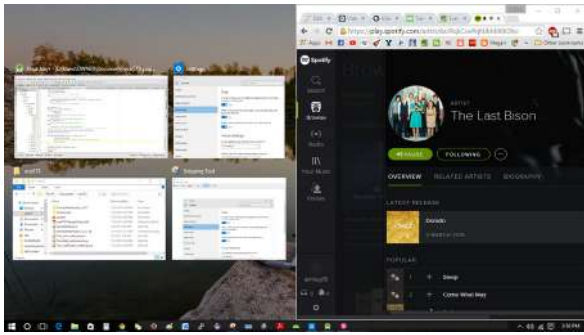


Multi-Window Interaction



**Wireless presentation
BYOD (Upto 9 Devices)**



Built-in video recorder



Full features front USB-C port



AMAZING ACCURATE TOUCH



REALISTIC WRITING EXPERIENCE



4K ANTI-GLARE UHD DISPLAY



INTERACTIVE WHITEBOARD



POWERFUL AND CRISP SOUND



TOTAL EYE-CARE SOLUTION

Pre Installed Device Management Software

Centralized command control & access


- ◇ Visualise & Supervise all devices
- ◇ Devices access & control in real-time
- ◇ Schedule maintenance / updates
- ◇ Centralized shut down / restart / sleep / wake up
- ◇ Send messages, trigger alerts and Generate usage reports to all or selected devices
- ◇ Source selection control management : HDMI / VGA / PC / OPS / Brightness / Contrast / Volume




The Slider

Pin Board

Green Board

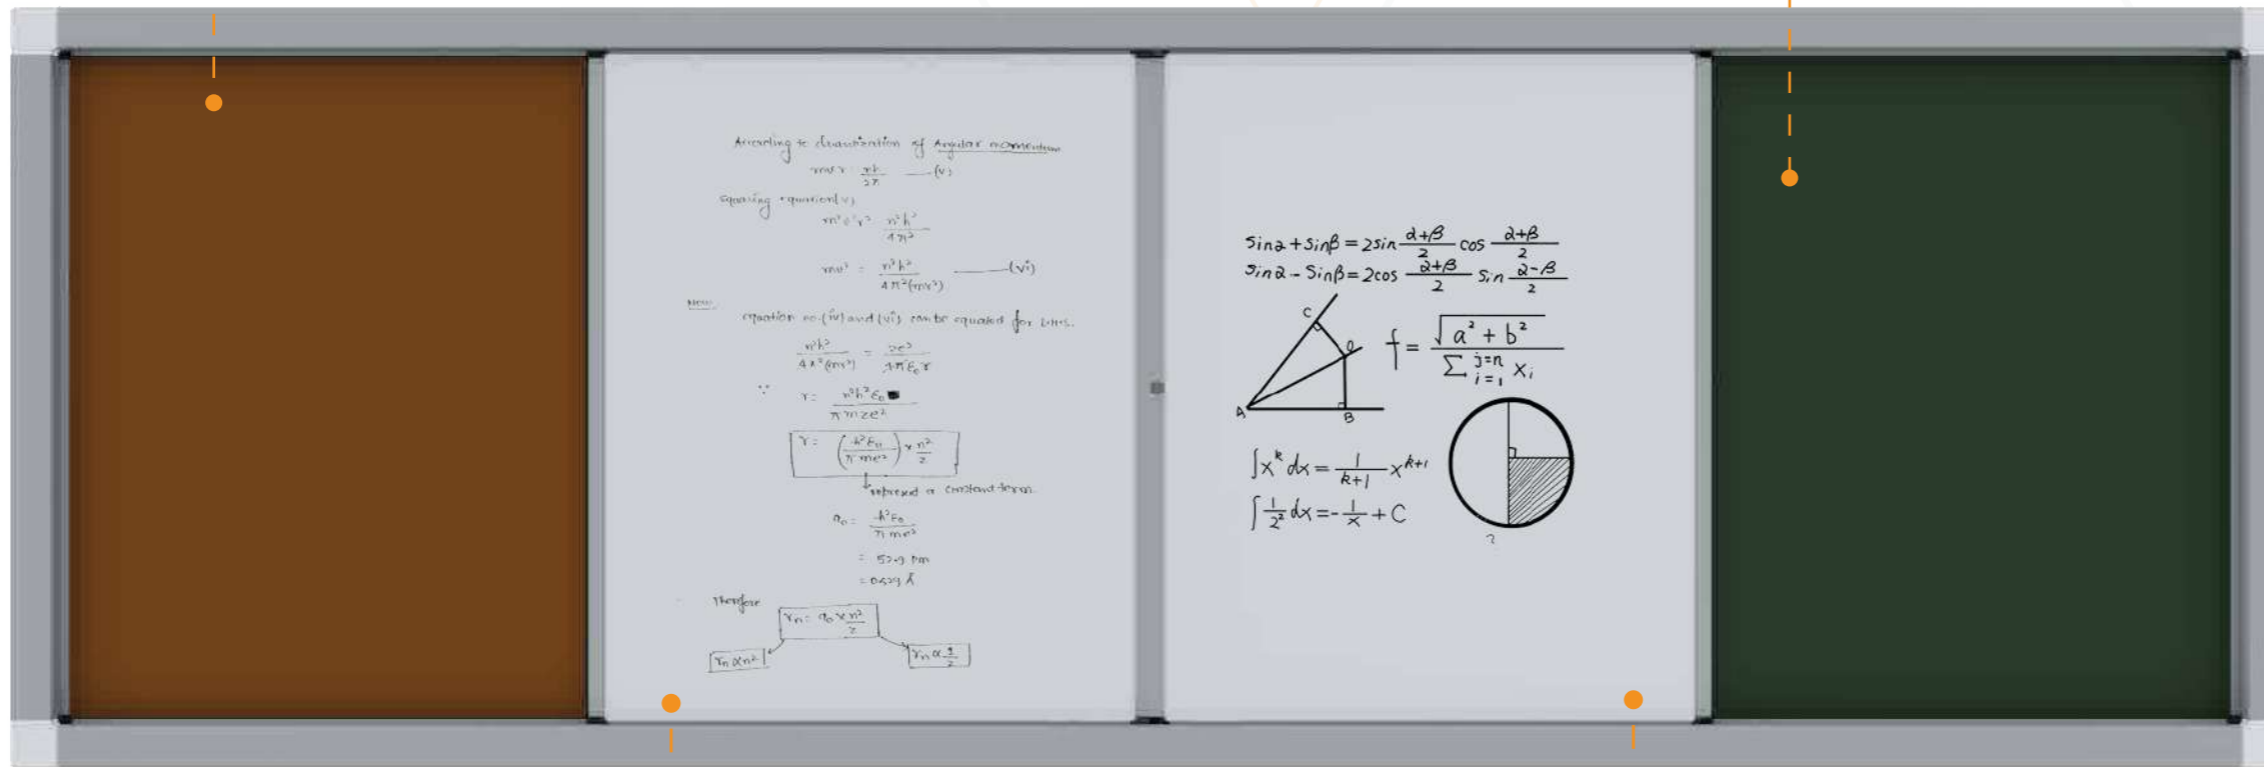

Available for 65" / 75" / 86" IFP's



Colour Options Available as per choice


Sliding white Boards



IFPD



Green Board/ White Board / Both.



Sliding Door Options Available - Single / Dual.

Optional Accessories



OPS PC

Fill your display's OPS slot with an on-board computer that brings you all the power of a desktop computer right to your display. As your organization continues to grow and demands more power, the OPS is easily swappable for a more powerful version.



Windows 10



8 GB RAM



1 TB HDD



USB Type-C
Connection



Built-in
WiFi



Powered by Intel
i5 Processor

IFPD Floor Stand

Support your various workspaces with reliable products that are compatible with IFP displays. Mount your panel to a wall or choose a more mobile mounting solution that best fit for your needs.



Wireless Presentation System INTERACT WP40

4K BYOD & BYOM

Participants can not only share their personal screens, but also use their laptops to easily access camera and microphone from large screen for starting a video conference.



PRODUCT SPECIFICATIONS

Item	Model	GI65	GI75	GI86	GI98	GI110
Panel	LCD Size Diagonal	65"	75"	86"	98"	110"
	Panel type	4K UHD	4K UHD	4K UHD	4K UHD	4K UHD
	Brightness	450cd/m ² (typ.)	450cd/m ² (typ.)	500cd/m ² (typ.)	500cd/m ² (typ.)	650cd/m ² (typ.)
	Contrast Ratio(typ)	1200:1 (typ.)	1200:1 (typ.)	1200:1 (typ.)	1200:1 (typ.)	1200:1 (typ.)
	Response Time(ms)	4ms (typ.)	4ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)
	View angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
	Life Time	1,00,000 hrs (min.)	1,00,000 hrs (min.)	1,00,000 hrs (min.)	1,00,000 hrs (min.)	1,00,000 hrs (min.)
Touch System	Bonding technology	Tempered glass and zero bonding touch display				
	Touch technology	Advanced Infra-red Touch frame				
	Tempered Glass	Toughened Glass 4mm				
	Number of touch points	20 Touch Points on Android & Windows				
	Response Time	4ms				
Mother board	Touch tool	Finger or touch pen or				
	Solution	GI982 / GI311D2	GI982 / GI311D2	GI982	GI982	GI982
	CPU	Quad Core / Octa Core	Quad Core / Octa Core	Quad Core	Quad Core	Quad Core
	RAM	4GB	4GB / 8GB	4GB / 8GB	4GB	4GB
	ROM	32GB + SD Card Slot	32GB/128GB + SD Card Slot	32GB/128GB + SD Card Slot	32GB	32GB
	OS	Android 11	Android 11 / Android13	Android 11 / Android13	Android 11	Android 11
System Compatibility	Compatible System	Windows, Linux, MAC OS, Android				
Wi-Fi Standard	Operating Frequency	Dual band 2.4GHz/5GHz				
Audio Output Power	Standard	Speaker : 8Ω /20W*2, SubWoofer : 20W				
Ports	USB	*5	*5	*5	*5	*5
	HDMI	*3	*3	*3	*3	*3
	Touch USB	*3	*3	*3	*2	*2
	Type-C	*2	*2	*2	*1	*1
	AUDIO IN	*1	*1	*1	*1	*1
	VGA	*1	*1	*1	*0	*0
	LAN IN/OUT	*1	*1	*1	*1	*1
	RS232	*1	*1	*1	*1	*1
	MIC IN	*1	*1	*1	*1	*1
	HDMI OUT	*1	*1	*1	*0	*0
	AUDIO OUT	*1	*1	*1	*1	*1
Power	SPDIF	*2	*2	*2	*1	*1
	DP	*1	*1	*1	*0	*0
	Voltage	100 V ~ 240 V/AC, 50/60 Hz				
Environment	Maximum (Watt)	220W	300W	380W	450W	660W
	Working Temperature	0°C ~ 50°C				
	Storage Temperature	Minus 10°C ~ 60°C				
	Working Humidity	20% ~ 80% RH Non-Condensing				
	Storage Humidity	10% ~ 60% RH Non-Condensing				
Structure	Product Size (mm) (W x H x D)	1482 x 897 x 88 mm	1716 x 1032 x 88 mm	1968 x 1170 x 88 mm	1957x1160x100 mm	2499x1474x100mm
	Package Size (mm) (W x H x D)	1640 x185 x1010mm	1860 x185 x1125mm	2095 x185 x1265mm	2120x220x1325mm	2606x1593x200mm
	N.W	38Kg±1.5Kg	52.5Kg±1.5Kg	65.5Kg±1.5Kg	85Kg±1.5Kg	110Kg±1.5Kg
	G.W	46Kg±1.5Kg	61.5 Kg±1.5Kg	77Kg±1.5Kg	98Kg±1.5Kg	144Kg±1.5Kg
	VESA	4-M6 Screw hole 600mm*400mm	4-M6 Screw hole 800mm*400mm	4-M8 Screw hole 800*600mm	4-M8 Screw hole 800*600mm	4-M8 Screw hole 800*600mm
	Accessories	Remote Control	*1			
Power Cord(3M)		*1				
USB Cable(3M)USB (A-B)		*1				
HDMI Cable(3M)HDMI		*1				
Touch Pen		*2				
Wall Mount	*1					

Disclaimer- All product images shown and specifications / features mentioned in this brochure are for reference only, actual product and specifications may change without any prior notice due to consistent product development and upgradation.

Certifications



Interactive Flat Panel Display



+91-1244422850
contact.interact@geeken.co.in
www.interactbygeeken.in
Plot No-161, Sector-5, IMT Manesar
Gurugram, Haryana - 122050

